



The Valencia is a weatherproof, sunlight readable kiosk providing digital content in any outdoor environment. With an IP65 rated enclosure this rugged display can show a variety of applications, both interactive and static. NextGenKiosks outdoor systems all feature a sealed, water-resistant enclosure and a thermostatically controlled heating/cooling system allowing the unit to operate unattended in extreme temperatures.

The all steel, zinc-plated, powder-coated stand holds up to harsh weather conditions such as direct rain, bright sunlight, and snow. The Valencia is offered in 43", 55", and 65" single or double-sided formats. Other options include custom colors, branding, or vinyl wraps as well as integrated peripheral and mounting alternatives.



Water & Dust Resistant Enclosure  
-40F to 140F Operational Temp  
3000 NIT Sunlight Readable Panel  
Automatic Brightness Control  
Secure Key Lock Door

High & Low Temp Protection  
Air Inlet and Outlet Dust-Proof  
AG Glass Anti-Reflective Film  
3 Sets of Insulation  
Electric Leakage Protection

Fan or AC Cooling  
Integrated Audio  
Secure Installation  
On-Site Support Warranty  
Ships Fully Assembled



MALLS



STADIUMS &  
AMUSEMENT PARKS



TRANSPORTATION




MUNICIPALITIES  
& UNIVERSITIES



HOSPITALITY

Digital Signage • Interactive Wayfinding/Directories • DOOH Advertising • Traffic Information

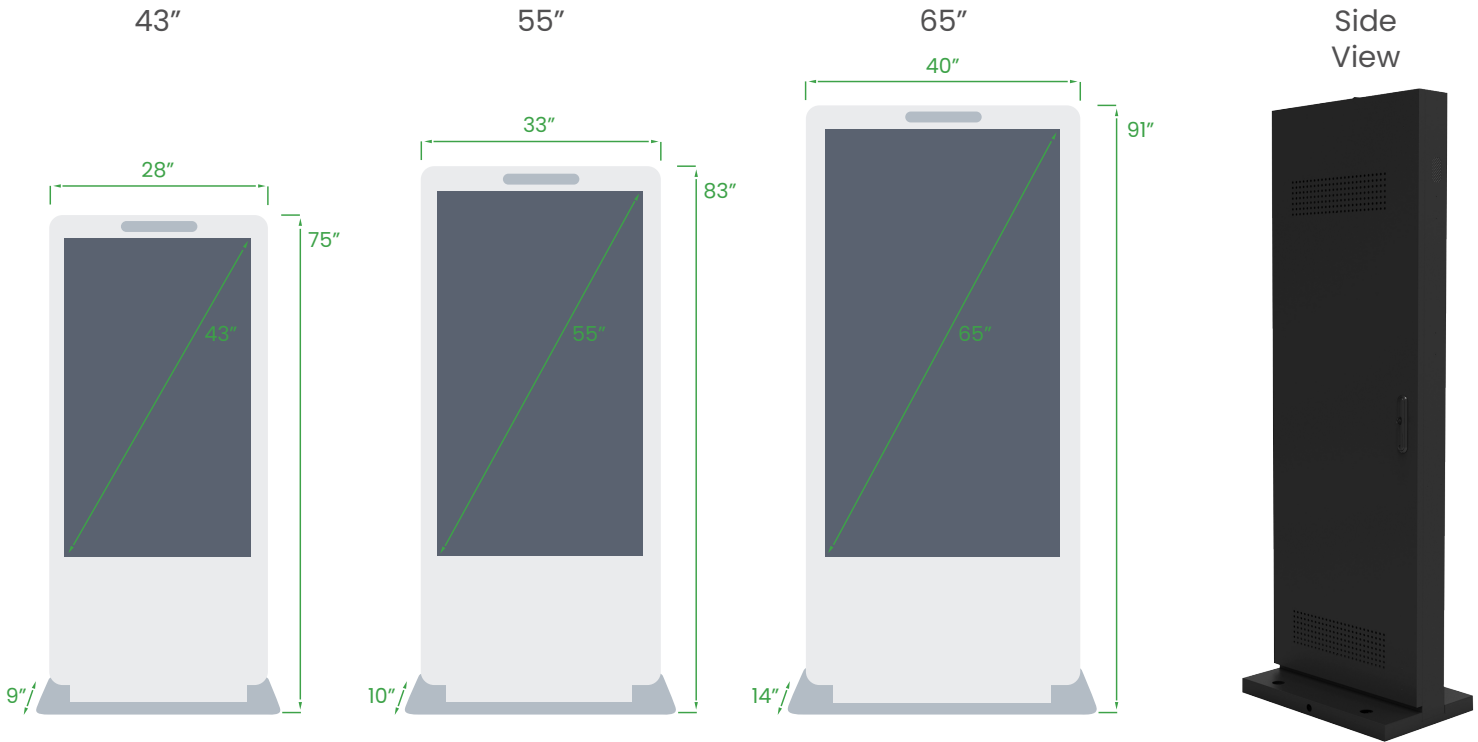

Single-sided dimensions above. Contact sales representative for dual-sided dimensions.  
Also available in 32".

## KIOSK PC

Operating System	Windows 11 IoT
CPU	Intel i5 or i7
RAM	16GB DDR4
Storage	128GB or 1T SSD
Connectivity	WiFi, Ethernet
Input/Output	HDMI, VGA, RJ-45, USB2.0 x4
Audio	Realtek ALC662 6-Channel HD Audio CODEC

## OPTIONAL HARDWARE

Touchscreen	10-Point PCAP
Cooling System	Air Conditioner
Connectivity	5G from AT&T

SPECIFICATIONS	43"	55"	65"
Max Resolution	1920x1080	3840x2160	3840x2160
Aspect Ratio	16:9	16:9	16:9
Brightness	3500cd/m <sup>2</sup>	3500cd/m <sup>2</sup>	3500cd/m <sup>2</sup>
Weight	230 lbs	255 lbs	280 lbs

**TEMPERATURE** -40°F to 140°F (Operational)

**CERTIFICATION** CE/FCC/RoHS

**WARRANTY** One Year On-Site Support; Extended Warranties Available